

Recessed rotating LED Down light with incorporated electronic gear and Chip on board. Improved color rendering index +90. High quality reflector with four different beam spreads. Lamp housing of die-cast aluminium for optimal cooling, long lifetime and low weight. Adjustable light direction using gyro function.


Technical data

Main input voltage	220-240V
Colour temperature	3000 K
CRI	>90
SDCM	3
Luminaire output/Energy consumption	
- Slim II 3000	2X2800 lm / 2x24 W
- Slim II 4000	2X3850 lm / 2x35 W
Total weight	2,6kg
Form of protection	IP 20, class III
Maximum number of drivers per fuse	10A type C: 36 pcs (24W) 16A type C: 58 pcs (24W)


Description	Reflector	Art.no	Last digit	Colour
Slim II 3000	Spot	2130331_	1	White
	Medium	2130332_	2	Grey
	Flood	2130333_	3	Black
	Wide Flood	2130334_		
Slim II 4000	Spot	2130391_		
	Medium	2130392_		
	Flood	2130393_		
	Wide Flood	2130394_		

Miscellaneous

Separate electronic gear with 2,5 m cord and plug.
Product available in other Kelvin temperatures.
Protection glass (PG) is optional.
DALI dimming on request.

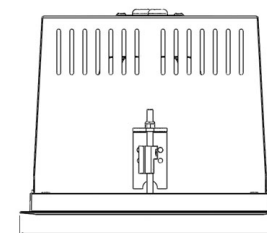

A

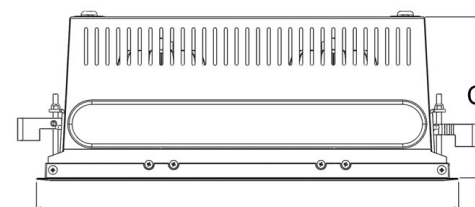

B

A=200, B=392 C=161 (mm)



Saw instruction: 379x187 mm