

Recessed LED Downlight with separated electronic gear. Improved color rendering index +90. High quality reflector with three different beam spreads. Lamp housing of die-cast aluminium for optimal cooling, long lifetime and low weight. Adjustable light direction using gyro function, max 45 degrees.


Technical data

Main input voltage	220-240V
Colour temperature	3000 K
CRI	>90
SDCM	3
Luminaire output/Energy consumption	2800 lm / 24 W
Total weight	0,83kg
Form of protection	IP 20, class III
Maximum number of drivers per fuse	10A type C: 36 pcs 16A type C: 58 pcs

Description	Reflector	Art.no	Last digit	Colour
Moon 3000 PG	Spot	2660331_	1	White
	Medium	2660332_	2	Grey
	Widewood	2660333_	3	Black

Miscellaneous

Seperate electronic gear with 3 m cord and plug
 Product available in other Kelvin temperatures
 Protection glass (PG) is optional
 DALI dimming on request.

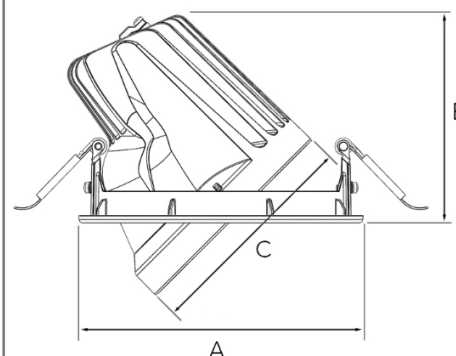

A=158 B=122 C=121,5 (mm)

